

EBE Series (R-410A) Evaporators

The New Standard In Marine High-Performance Evaporators



Compact EBE split evaporators for boats are draw-through, ductable cooling units with reverse-cycle heating. Featuring a rotatable, high-efficiency permanent split capacitor (PSC) blower in which the motor is concealed, EBE series evaporators are available in capacities from 6K to 36K BTU/hr. EBHE units have electric heat.

The EBE Series was designed for installation low in a closet, cabinet, or other enclosed space, with discharge air ducted to one or more grilles high in the cabin. EBE units can be used with a combination of plenums and flexible duct, or built-in ductwork may be used. If you are using built-in ductwork, a flexible transition between the blower and duct should be installed.

Vibration-isolation mounting is built into each EBE unit to reduce noise and vibration. The PSC blower is supported by a sturdy aluminum bracket with isolation grommets to reduce possible vibration. The blower's internal motor housing reduces the overall unit depth for easier installation and promotes quieter operation.

The drain pan and blower housing are covered with insulating foam which reduces noise and secondary condensation.

The "positive flow" drain pan has an anti-slosh, antifungal foam lining. Two 1/2 in. (13 mm) drains are located on the blower side of the drain pan.

Marine Air DX evaporators can be controlled using the Elite or Passport I/O keypad displays on the Passport I/O control system.

Key Benefits


- Compact ductable cooling or heating units.
- High-velocity (HV) fully-insulated blowers are rotatable.
- Blowlers are rotatable.
- Insulated condensate pan with anti-slosh, anti-fungal foam lining.
- Available with electric heat (EBHE models).
- High-efficiency evaporator coil.
- Larger blower inlet for increased air flow across the coil.
- Blower support bracket with cushioned mounts to reduce noise and vibration.
- Increased metal thickness on structural parts for added strength.
- Thermal expansion valve for optimal performance over a range of conditions.
- Designed to be used with Emerald Series (R-410A) condensers.

Specifications for EBE Series (R-410A) Evaporators

Model ⁽¹⁾	EBE18	EBE24	EBE30	EBE36	EBE48	EBE60	EBE72	EBHE16	EBHE24
Capacity (BTU/h)	18000	24000	30000	36000	8000	10000	12000	16000	24000
Voltage @ 50/60Hz ±Pr (V)	230	230	230	230	230	230	230	230	230
Full Load Amps (FLA) Blower (A)	1.15	1.64	4	4	0.98	0.66	0.56	1.15	1.64
Electric-Heat (kW/hp)	N/A	N/A	N/A	N/A	1/1.4	1.5/2.1	2/2.7	2/2.7	3/4.1
Heater Amps (A)	N/A	N/A	N/A	N/A	4.35	6.52	8.7	8.7	13.04
Air Flow (cfm/m ³ h)	540/917.5	800/1359.3	1000/1699.1	1200/2038.9	286/451.1	333/565.8	400/679.7	533/905.6	800/1359.3
Height-Coil (in/mm) ⁽²⁾	13.63/347	16.5/420	20.5/521	20.5/521	11.25/286	12.5/318	12.5/318	13.5/343	16.5/420
Height-Blower (in/mm) ⁽²⁾	15.13/385	17/432	22/559	22.25/566	12.5/318	13.5/343	13.5/343	15.5/394	17/432
Width (in/mm) ⁽²⁾	16/407	20/508	20.75/528	20.75/528	13.75/350	14.25/362	14.25/362	16/407	20/508
Depth (in/mm) ⁽²⁾	14/356	14.5/369	15/381	17.5/451	12/305	13.75/350	14.5/369	14.75/375	15/381
Net Weight (lbs/kg) ⁽³⁾	28/12.8	36/16.4	42/19.1	42/19.1	21/9.6	23/10.5	23/10.5	28/12.8	41/18.6
Gross Weight (lbs/kg) ⁽³⁾	36/16.4	45/20.5	42/19.1	50/22.7	29/13.2	31/14.1	31/14.1	36/16.4	49/22.3

¹ 'EBE' indicates evaporator without electric heat; 'EBHE' indicates evaporator with electric heat. Dometic Marine also offers an EBHE6-1KW and EBHE16-3KW. For more information please contact a sales representative at 954-973-2477.
² All dimensions ± 0.30 in. (8 mm).
³ All weights ± 10%

Dimensions

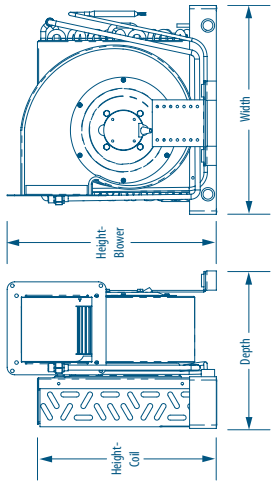

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
 www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
 After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
 For all other areas visit our website to find your nearest distributor.

L-2855 Rev. 20120803

Specifications and availability subject to change without notice.

Dealer

